

NFPA 285 DETAIL NOTES:
 ALL DETAILS TO BE REVIEWED BY A DESIGN PROFESSIONAL
 PRIOR TO USE.
 DETAIL IS INTENDED TO PROVIDE NFPA 285 GUIDANCE FOR
 INSULATION INSTALLATION AND WINDOW DETAIL ONLY.
 REFER TO TER 1306-03 FOR A LIST OF ACCEPTABLE NFPA 285
 COMPLIANT COMPONENTS.
 FLASH WINDOW & DOOR OPENINGS PER WRB
 MANUFACTURER'S GUIDELINES

MIN. 0.04" ALUMINUM HEADER FLASHING


$\frac{5}{8}$ " GYPSUM (TYPICAL)

$2\frac{1}{2}$ " X 10" X16GA L ANGLE
 CONTINUOUS AROUND OPENING

ENERGYSHIELD PRO/PRO2 (4.0" MAX)
 ENERGYSHIELD CGF PRO (4.0" MAX)
 ENERGYSHIELD PLY PRO (4.7" MAX)

ONE OF MANY APPROVED WRB'S
 SEE TER 1306-03

ACM / MCM METAL PANEL

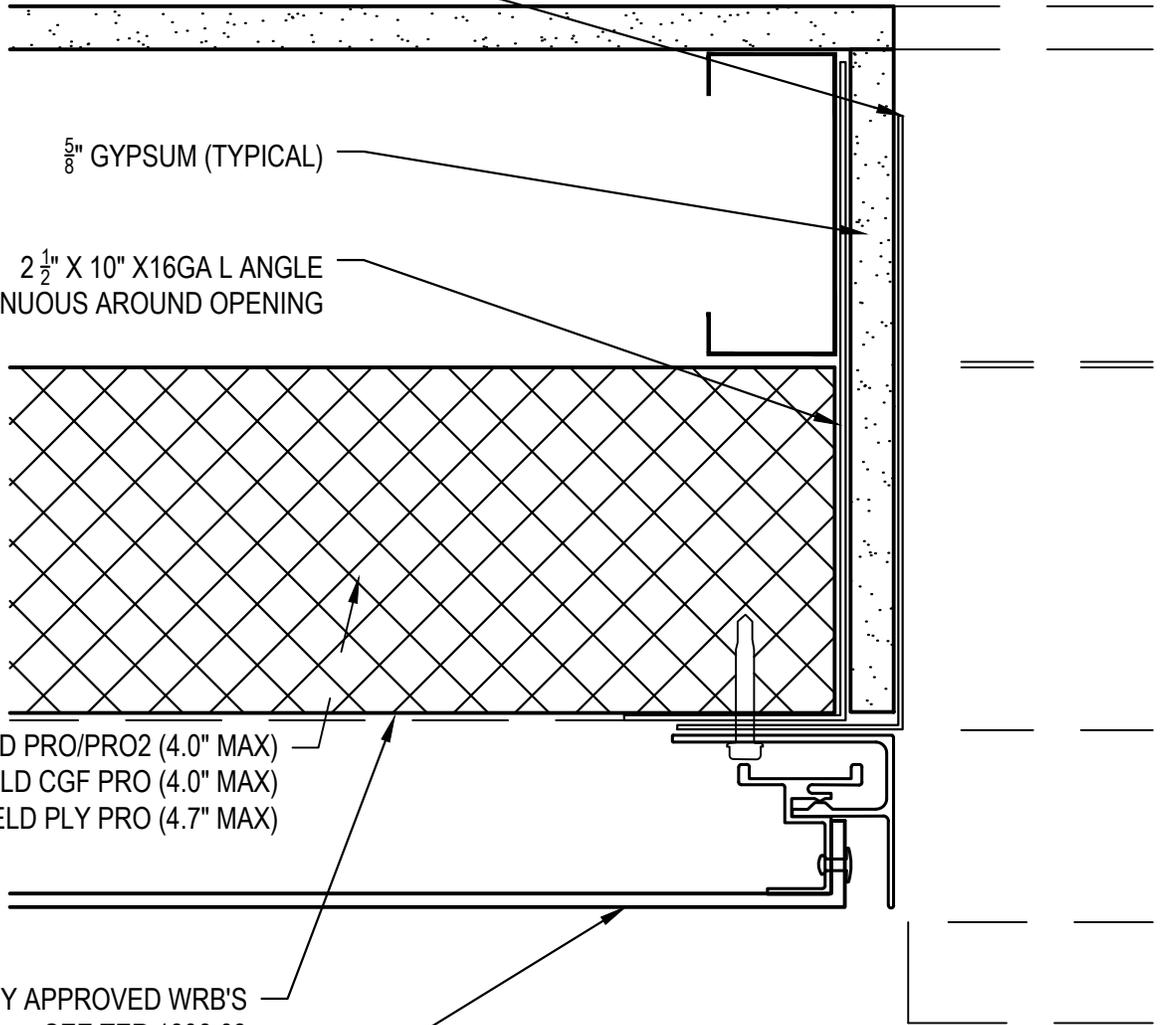

STEEL FRAMED - MCM - NON-GYP.



WINDOW JAMB
NFPA 285 COMPLIANT

DATE / REVISION
08/09/17

NOT TO SCALE

DETAIL NO.
ESP.NG.WJ.A.01